







35.9" LCD BAR DISPLAY

DIGITAL SIGNAGE
ANDROID INTEGRATED SMART DISPLAY


-  - RUNS ANDROID 7.1
-  - 1920 X 536 PIXEL RESOLUTION
-  - ULTRA WIDE VIEWING ANGLE SUPER MVA RGB COLOR DISPLAY
-  - REMOTE MANAGEMENT EASILY VIA WI-FI & ICM SERVER
(BUILT-IN ICM PLATFORM / COMPATIBLE WITH CLIENTS' OWN SET-UP)

Specifications


Product Name	35.9 inch LCD BAR DISPLAY		
Model Number	JIC-359FMLCRSH216-03		
Display			
Active area (mm)	878.1(H) x 243.0(V) [35.9 inch]	Number of colors	16.7M
Bezel opening area (mm)	881.4(H) x 245.0(V)	Display operation mode	MVA Normally black; Transflective
Outline dimension (mm)	901.4(H) x 265.0(V) x 36.0(D)	Surface treatment	Haze 1%
Display technology	a-Si TFT-LCD	Viewing angle	Full View 88/88/88/88 (typ.)(CR≥10)
Resolution	1920 x 536	Brightness (cd/m ²) (typ.)	350
Pixel pitch	0.45735(H) x 0.4494(W)	Contrast ratio (typ.)	5000:1
Pixel arrangement	RGB vertical stripe	Frame rate	60Hz
System			
CPU	ARM Cortex 2+4 core	System	Android 7.1
RAM	2 GB (Max support: 4 GB)	Terminal	USB x2 (support mouse control), mico SD x1, HDMI-IN x1, HDMI-OUT x1
eMMC memory	16 GB (Max support: 128 GB)	Photo format	BMP, JPEG, PNG, GIF, etc.
Internet connection	1000M ethernet port x1, Wi-Fi 2.4G	Media format	AVI, MOV, MP4, WMV, WEBM, etc.
Audio output	3.5 mm audio jack, 4R/3W speaker	Net weight	8.0 kg
Power voltage	Input AC 100V~240V; Output DC 12V~5A	VESA mounting (mm)	100 x 100, 200 x 200
Power consumption	28W (typ.)	Languages	Chinese, English, Japanese, etc. (Optional to language extension)
Power connection	USB Type-C		
Temperature	Tst: -20~60 °C; Top: 0~50 °C		

OUTLINE DRAWINGS OF ICM

35.9 inch LCD BAR DISPLAY #JIC-359FMLCRSH216-03

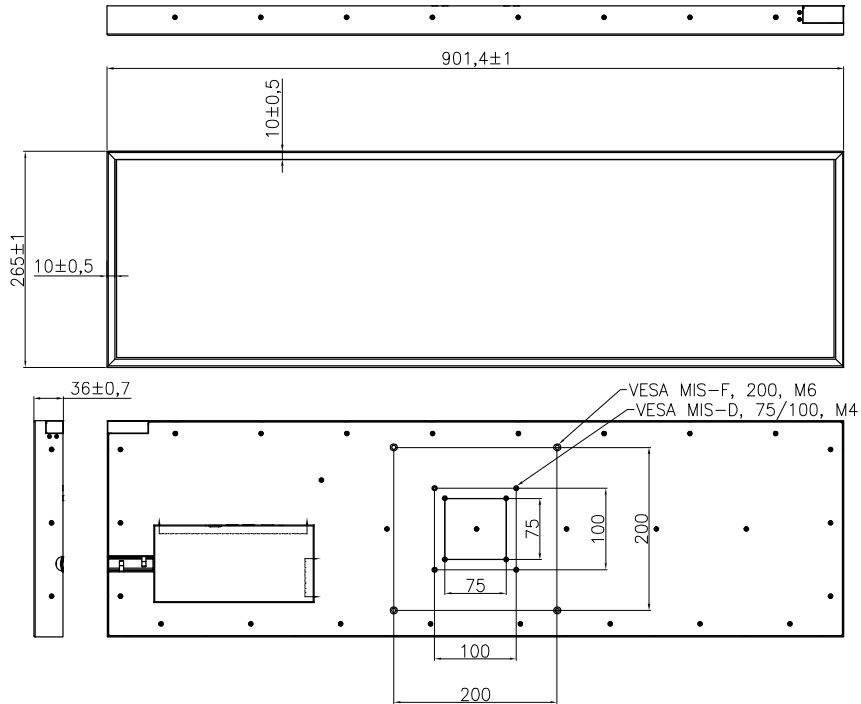

28.8 inch LCD BAR DISPLAY #JIC-288FILCRSH216-03

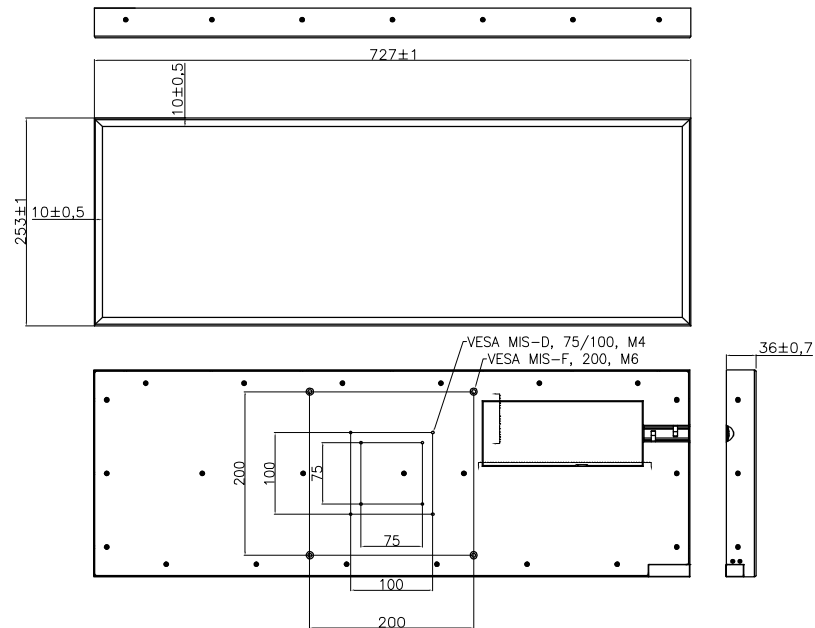

I/O Terminals: 28.8, 35.9 inch

